

TI Designs: TIDEP-0102

适用于保护继电器的人机界面 (HMI) 参考设计



说明

这款基于处理器的参考设计有助于加快产品上市步伐，并帮助客户设计具有成本优势和人机界面(HMI)的保护继电器解决方案。此参考设计展示了对于保护继电器 HMI 而言常见的二维 (2D) Qt 图形用户界面 (GUI)，以及用于软件渲染图形的 TI 处理器功能。AM335x 处理器具有可扩展能力，提供一系列处理速度，使用同一软件开发环境来满足低端至高端 应用 的需求，并提供充足与关键外设的连接以保护继电器 HMI（如通用异步接收器/发送器 (UART) 和 CAN）。

资源

TIDEP-0102	设计文件夹
AM335x	产品文件夹
TMDSSK3358	工具文件夹
PROCESSOR-SDK-AM335X	工具文件夹

特性


- 保护继电器 HMI（使用软件加速图形和 Qt）的示例屏幕
- 支持电阻式触摸屏
- 在提供的 4.3 英寸 LCD 上支持 480×272 分辨率；在其他显示器上可扩展到 2048×2048
- 在 TI 的处理器 SDK-Linux 上构建以便于扩展到其他平台 Sitara™处理器

应用

- [保护继电器](#)
- [变电站自动化](#)
- [电能质量分析仪](#)



咨询我们的 E2E 专家

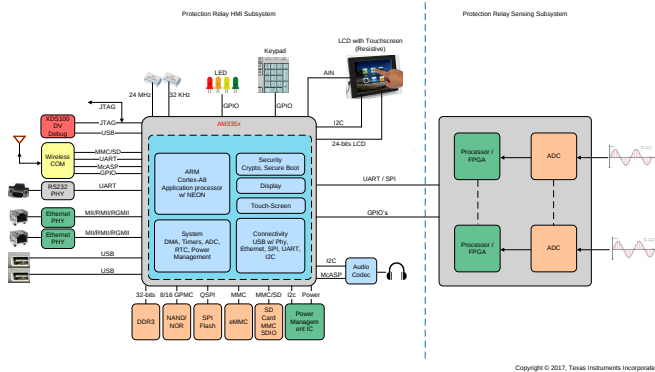

该 TI 参考设计末尾的重要声明表述了授权使用、知识产权问题和其他重要的免责声明和信息。

1 System Description

The worldwide electric-power infrastructure is a set of interconnected assets for power generation, transmission, conversion, and distribution, which is commonly referred to as *the grid*. Protection relays are used in the grid to measure a number of electrical parameters and take action as defined by the system integrator.

The protection relay system consists of sensing devices, analog-to-digital convertor (ADC) devices, a central processing unit (CPU) such as a microcontroller (MCU) or microprocessor (MPU), communication subsystems for both internal data exchange and external communications, and a human machine interface (HMI).

The Sitara™ AM335x processor, which is one of the most popular processors for industrial HMI applications, not only has the resources targeted for processing the user interface of a protection relay, but the AM335x processor's easy-to-use programming tools and on-chip capabilities give designers a head start on protection relay development projects.

Based on the AM335x starter kit evaluation module (EVM), the TIDEP-0102 reference design is a quick starting point for customers who want to design a protection relay HMI module or system for protection relay.

The TI AM335x processors are based on the Arm® Cortex®-A8 core (see [Figure 1](#)). These enhanced processors have rich peripherals and an advanced display capability, including 2-D and 3-D acceleration to help customers design cost-effective protection relay HMIs. The devices support high-level operating systems (HLOS) such as Linux, which is available free of charge from TI. The devices offer an upgrade to systems based on lower-performance Arm cores, provide updated peripherals, and support the typical interfaces, such as UART.



图 1. Sitara™ AM335x Chip


The AM335x processor supports 24-bit, liquid-crystal display (LCD) controllers with a resolution up to 2048 × 2048, which allows system designers to select various screen sizes and resolutions based on use cases and provides scalability from low to mid-end.

(continued)

The Qt framework is used to develop the GUI for protection relay HMI application software. Qt is a cross-platform application framework written in C++. Learn more about Qt at <https://www.qt.io>.

2 System Overview

2.1 Block Diagram

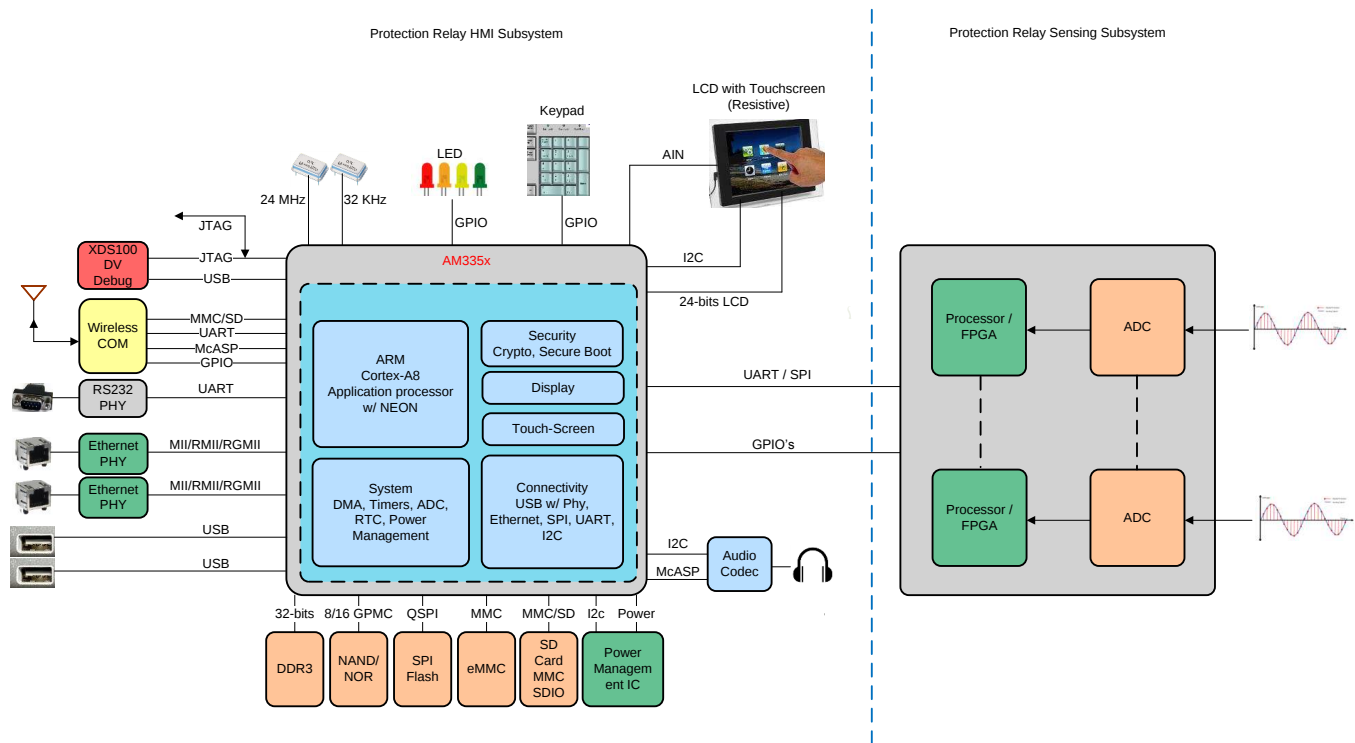

Copyright © 2017, Texas Instruments Incorporated

图 2. Protection Relay HMI Block Diagram


2.2 Highlighted Products

2.2.1 AM335x

The AM335x processors, based on the Arm Cortex-A8 core, are enhanced with image, graphics processing, peripherals, and industrial interface options, such as EtherCAT® and PROFIBUS®.

These devices support HLOS, such as Linux. The AM335x processors contain the subsystems in [Figure 3](#): the microprocessor unit (MPU) subsystem, which is based on the Arm Cortex-A8 core, and the PowerVR SGX™, which is a graphics accelerator subsystem that provides 3-D graphics acceleration to support display and gaming effects.

The Programmable Real-Time Unit Subsystem and Industrial Communication SubSystem (PRU-ICSS) is separate from the Arm core and allows independent operation and clocking for greater efficiency and flexibility. The PRU-ICSS enables additional peripheral interfaces and real-time protocols, such as EtherCAT, PROFINET®, EtherNet/IP™, PROFIBUS, Ethernet Powerlink™, Sercos™, and others.

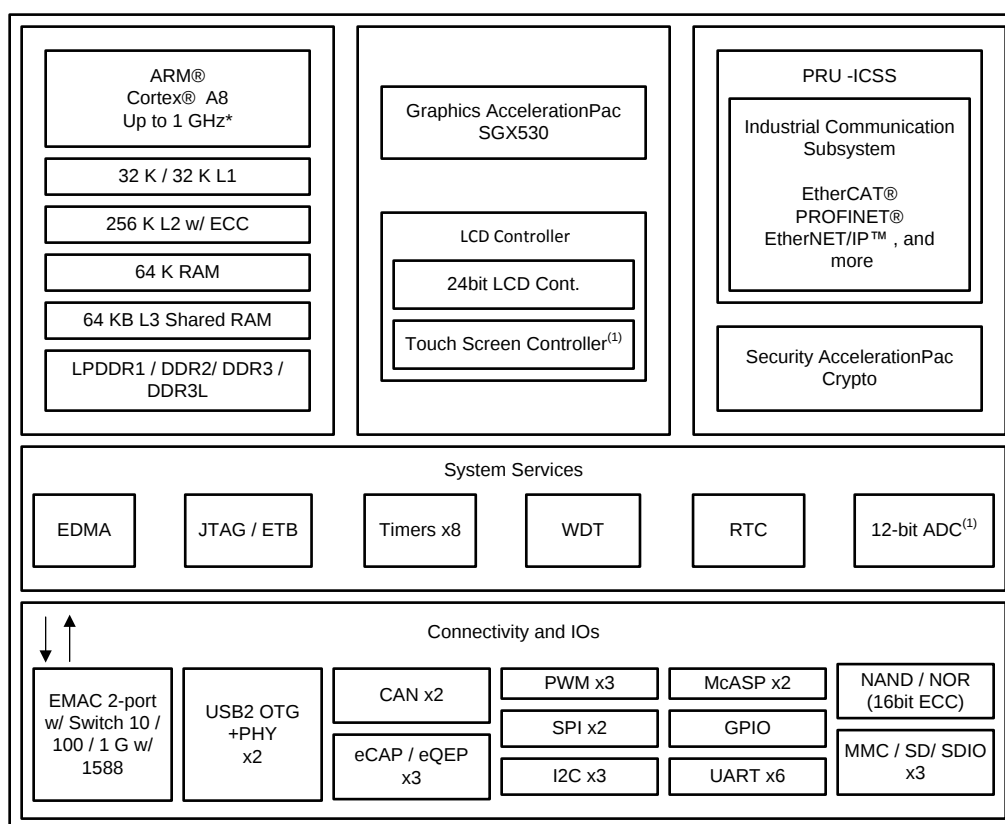

00 MHz / 1 GHz only available on 15 x 15 package. 13 x 13 support up to 600 MHz. Use of TSC will limit available ADC channels.

Copyright © 2017, Texas Instruments Incorporated

图 3. AM335x Block Diagram

Additionally, the programmable nature of the PRU-ICSS, along with its access to pins, events, and all system-on-chip (SoC) resources, provides flexibility in implementing fast, real-time responses, specialized data handling operations, custom peripheral interfaces, and in offloading tasks from the other processor cores of an SoC.

3 Hardware, Software, Testing Requirements, and Test Results

3.1 Required Hardware and Software

3.1.1 Hardware

The AM335x Starter Kit EVM is required to run the protection relay HMI demonstration application. The AM335x Starter EVM is a stand-alone test, development, and evaluation module system that enables developers to write software and develop hardware around an AM335x processor subsystem.

See the [AM335x Starter Kit Hardware User's Guide](#) for instructions on getting started and details on the hardware architecture of the AM335x Starter Kit EVM.

3.1.2 Software

The AM335x Processor SDK for Linux (Processor-SDK-Linux) provides a fundamental software platform for development, deployment, and execution of Linux-based applications. The protection relay HMI demonstration application source code is integrated in the Processor-SDK-Linux. The example application can be played through Matrix GUI application launcher. More information on Qt application development using Processor-SDK-Linux can be found in and .

The Processor-SDK-Linux package contains a software user's guide and additional documentation for setting up and running the demonstration applications. Download the package from www.ti.com/tool/PROCESSOR-SDK-AM335X.

For the purposes of this design guide, use a Linux host machine for the following instructions. With the required hardware, program the SD card with the Linux processor SDK image using the following steps:

1. Download the SDK installer `ti-processor-sdk-am335x-evm-xx.xx.xx.xx-Linux-x86-Install.bin` from TI.com (where `xx.xx.xx.xx` is the version number of the latest Linux processor SDK).
2. Create the SD card with default images using the *SDK Create SD Card Script* or see the user's guide.
3. Boot the Linux kernel and file system using the created SD card.

3.2 Testing and Results

3.2.1 Test Setup

This subsection provides details of the test setup with the required hardware and software to run the TI protection relay HMI software application.

1. Insert the micro SD card created in 节 3.1.2 in the location shown in Figure 4.
2. Insert the 5-V power supply and press the power button shown in Figure 4.

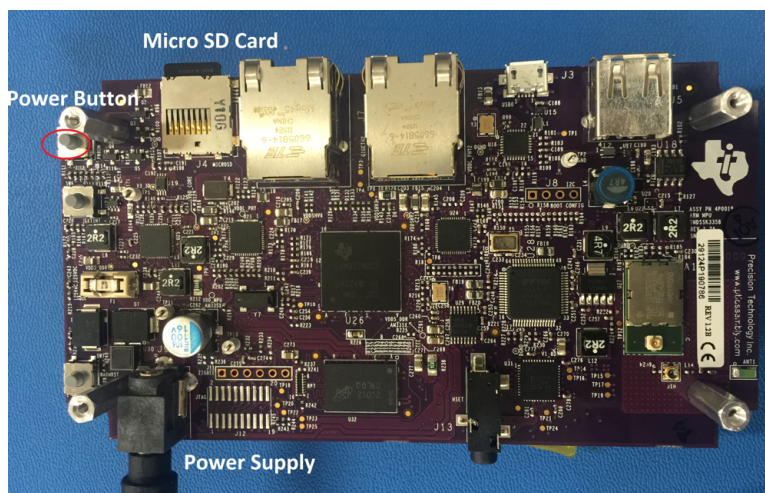


图 4. AM335x Starter Kit Setup (LCD Face Down)

3. The board boots up, the Matrix GUI application launches, and the interface shows on the LCD screen (see Figure 5).



图 5. AM335x Starter Kit Setup (LCD Face Up)

3.2.2 Test Results

The test results are as follows:

1. [Figure 6](#) shows the default Matrix GUI. Click on the *HMI* icon to navigate to the protection relay HMI demonstration.



图 6. AM335x Default Matrix GUI

2. [Figure 7](#) shows the *HMI Submenu*, which is the next screen that appears. Click on the *PROTECTION_RELAYS* icon.

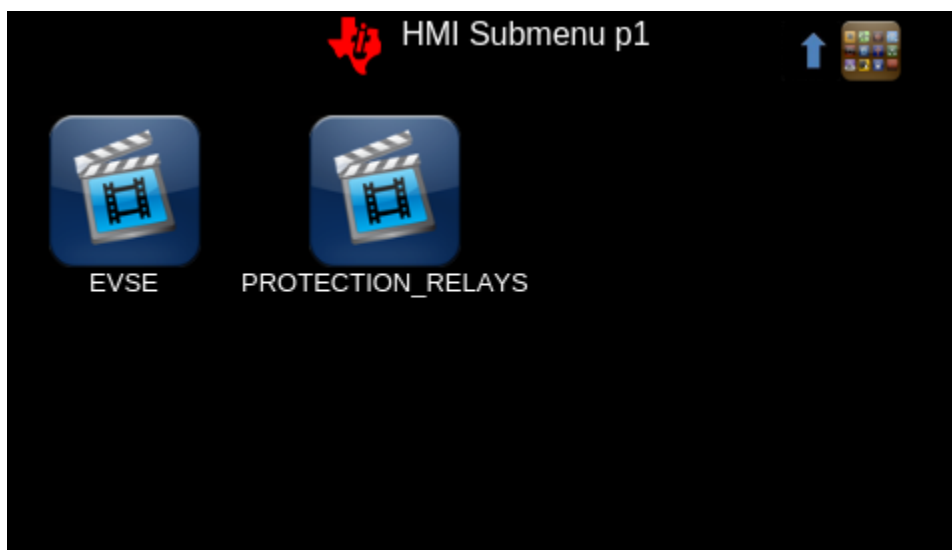


图 7. HMI Submenu

3. [Figure 8](#) then shows on the screen. Click the *Run* button to launch the protection relay HMI demonstration GUI.

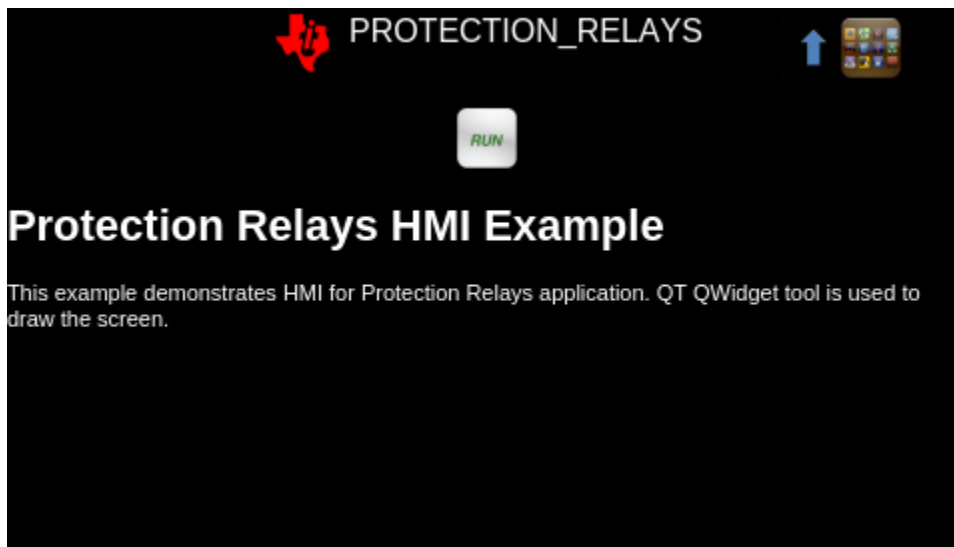


图 8. Protection Relay HMI Description and Run Screen

4. The protection relay HMI demonstration GUI launches and various example control icons are displayed on the screen (see [Figure 9](#)).
 - Click on any of the icon to go to the default action screen [Figure 9](#).


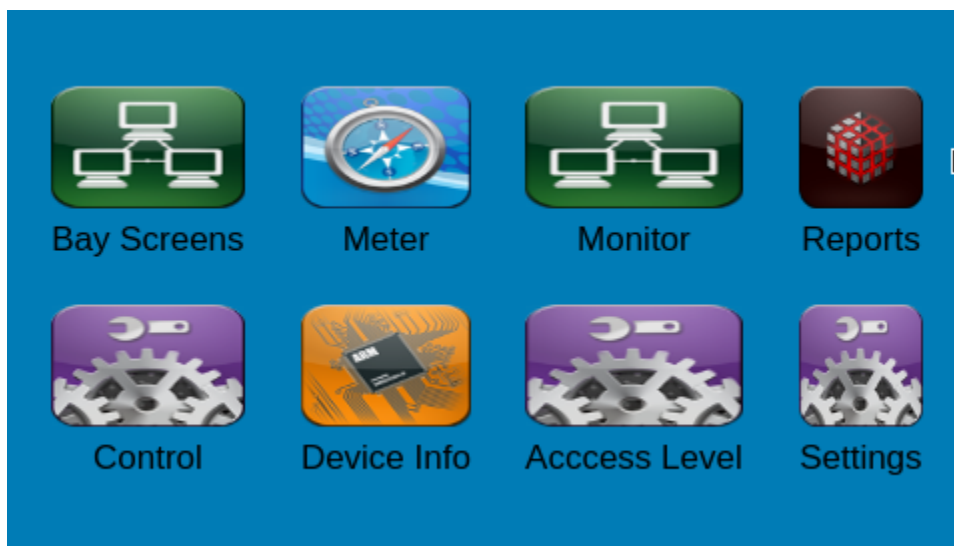


图 9. Protection Relay HMI Demonstration GUI—Screen One

5. Example action screen is shown with text displayed.
 - Click on *Back* button to go back to [Figure 9](#)
 - Click on *Exit* button to stop running the demonstration.

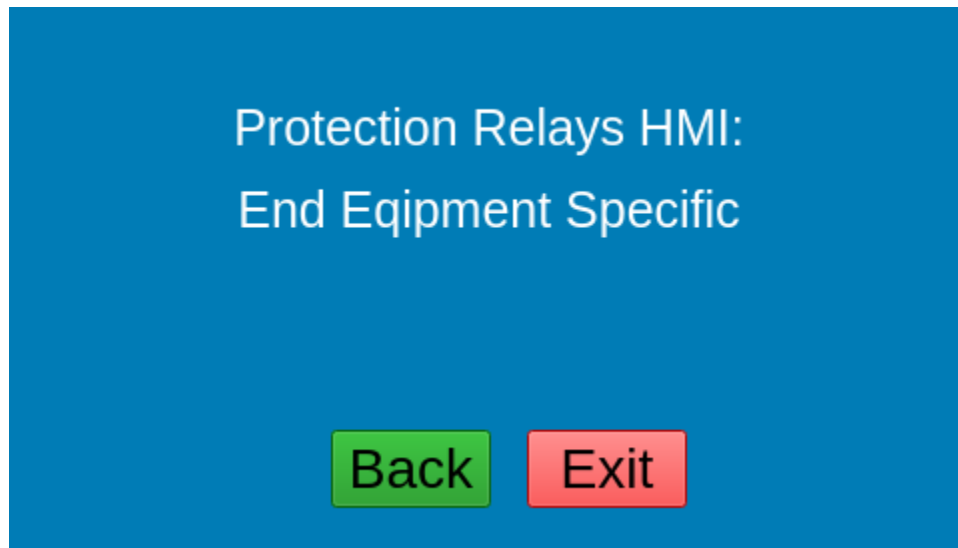

The *Exit* button on this screen is the only way to exit out of the demonstration GUI and return to the Matrix GUI.

图 10. Protection Relay HMI Demonstration GUI—Screen Two

4 Design Files

To download the hardware design files for the AM335x Starter Kit, see the design files at [TIDEP-0102](#).

5 Software Files

Download the Processor SDK Linux for AM335x from the [AM335x software product page](#).

6 Related Documentation

1. Texas Instruments, [AM335x Starter Kit Hardware User's Guide](#) , AM335x Wiki Page
2. Texas Instruments, [Qt Training: Multipage Resizable Graphical User Interfaces containing Media](#) , Application Report (SPRACB2)
3. Texas Instruments, [Sitara Linux Training: Hands on with QT](#) , Wiki Page
4. Texas Instruments, [Processor SDK Linux Software Developer's Guide](#) , Wiki Page
5. Texas Instruments, [Processor Linux SDK Graphics and Display](#) , Wiki Page

6.1 商标

Sitara is a trademark of Texas Instruments.

Arm, Cortex are registered trademarks of Arm Limited (or its subsidiaries).

EtherCAT is a registered trademark of Beckhoff Automation GmbH, Germany.

Ethernet Powerlink is a trademark of Bernecker + Rainer Industrie-ElektronikGes.m.b.H..

PowerVR SGX is a trademark of Imagination Technologies Limited.

EtherNet/IP is a trademark of Odva, Inc..

PROFIBUS, PROFINET are registered trademarks of PROFIBUS and PROFINET International (PI).

Sercos is a trademark of Sercos International.

All other trademarks are the property of their respective owners.

7 Terminology

EVM— Evaluation module

GUI— Graphical user interface

HLOS— High-level operating systems

HMI— Human machine interface

Protection Relay — Electric vehicle supply equipment

PRU-ICSS— Programmable Real-Time Unit Subsystem and Industrial Communication SubSystem

SDK— Software development kit

SoC— System-on-chip

UART— Universal asynchronous transmitter/receiver

8 About the Author

AMRIT MUNDRA is a part of System Team in Catalog Processors BU. He has been with TI for more than 14 years and has worked on multiple IPs and SoCs. He is the security architect for Keystone3 and security lead for Catalog BU. Amrit also is System lead for EPOS EE initiative in BU. Amrit earned his Master of Science in Electrical Engineering (MSEE) from SMU, Dallas, TX.

MANISHA AGRAWAL is part of Software Application team in the Catalog Processors BU. She has been with TI for more than 11 years and has worked on OMAP, DAVINCI and Sitara platforms. She is the Application lead for all the applications that includes video IPs such as capture, display, graphics, codec, and other video processing engine on these devices. Manisha earned her Master of Science in Digital Signal Processing from IIT, Kanpur, India.

有关 TI 设计信息和资源的重要通知

德州仪器 (TI) 公司提供的技术、应用或其他设计建议、服务或信息，包括但不限于与评估模块有关的参考设计和材料（总称“TI 资源”），旨在帮助设计人员开发整合了 TI 产品的应用；如果您（个人，或如果是代表贵公司，则为贵公司）以任何方式下载、访问或使用了任何特定的 TI 资源，即表示贵方同意仅为该等目标，按照本通知的条款进行使用。

TI 所提供的 TI 资源，并未扩大或以其他方式修改 TI 对 TI 产品的公开适用的质保及质保免责声明；也未导致 TI 承担任何额外的义务或责任。TI 有权对其 TI 资源进行纠正、增强、改进和其他修改。

您理解并同意，在设计应用时应自行实施独立的分析、评价和判断，且应全权负责并确保应用的安全性，以及您的应用（包括应用中使用的 TI 产品）应符合所有适用的法律法规及其他相关要求。您就您的应用声明，您具备制订和实施下列保障措施所需的一切必要专业知识，能够 (1) 预见故障的危险后果，(2) 监视故障及其后果，以及 (3) 降低可能导致危险的故障几率并采取适当措施。您同意，在使用或分发包含 TI 产品的任何应用前，您将彻底测试该等应用和该等应用所用 TI 产品的功能。除特定 TI 资源的公开文档中明确列出的测试外，TI 未进行任何其他测试。

您只有在为开发包含该等 TI 资源所列 TI 产品的应用时，才被授权使用、复制和修改任何相关单项 TI 资源。但并未依据禁止反言原则或其他法理授予您任何 TI 知识产权的任何其他明示或默示的许可，也未授予您 TI 或第三方的任何技术或知识产权的许可，该等产权包括但不限于任何专利权、版权、屏蔽作品权或与使用 TI 产品或服务的任何整合、机器制作、流程相关的其他知识产权。涉及或参考了第三方产品或服务的信息不构成使用此类产品或服务的许可或与其相关的保证或认可。使用 TI 资源可能需要您向第三方获得对该等第三方专利或其他知识产权的许可。

TI 资源系“按原样”提供。TI 兹免除对 TI 资源及其使用作出所有其他明确或默示的保证或陈述，包括但不限于对准确性或完整性、产权保证、无屡发故障保证，以及适销性、适合特定用途和不侵犯任何第三方知识产权的任何默认保证。

TI 不负责任何申索，包括但不限于因组合产品所致或与之有关的申索，也不为您辩护或赔偿，即使该等产品组合已列于 TI 资源或其他地方。对因 TI 资源或其使用引起或与之有关的任何实际的、直接的、特殊的、附带的、间接的、惩罚性的、偶发的、从属或惩戒性损害赔偿，不管 TI 是否获悉可能会产生上述损害赔偿，TI 概不负责。

您同意向 TI 及其代表全额赔偿因您不遵守本通知条款和条件而引起的任何损害、费用、损失和/或责任。

本通知适用于 TI 资源。另有其他条款适用于某些类型的材料、TI 产品和服务的使用和采购。这些条款包括但不限于适用于 TI 的半导体产品 (<http://www.ti.com/sc/docs/stdterms.htm>)、[评估模块](#)和样品 (<http://www.ti.com/sc/docs/sampters.htm>) 的标准条款。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2017 德州仪器半导体技术（上海）有限公司